


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 24 TOWNSHIP 17 RANGE 2  
DATE: 5-18-05  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-13-00

IN. S.P.C. E ZONE NAD '83  
NAME: 17022403  
N: 517842.9510(m)  
E: 50909.2980(m)

17022403 and 17031901  
are the same corner

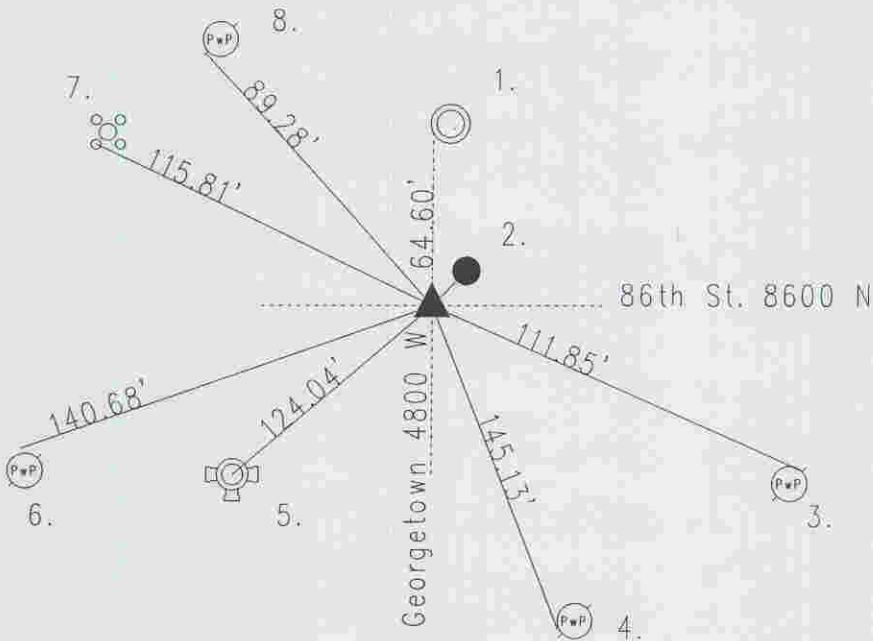

Original post set 1821 by Laughlin with witness: 6" hackberry N 22 E 21 links, 12" hickory S 21 W 12 links per Marion County Atlas pg. 4. Hosbook 8-10-1853 called no stone; but, witness 22" beech N 15 W 37 links per Pike Township Legal Survey Book pg. 34. MCSO called axle with wheel plate. Miller 5-5-75 called brass plug 3" down. Excavated 5-12-95 by Kiste. Harrison set. Re-tied 4-13-00 by Wilcoxon. Re-tied 5-18-05 by Wilcoxon.

17022403 and 17031901 are same corner

REF.	DISTANCE	DESCRIPTION
1.	64.60'	Due N to Cut 'x' S-rim of manhole
2.	8.90'	C/I Harrison
3.	111.85'	PK nail NE PwP#9-197 B 12"up
4.	145.13'	Small Mag nail SW PwP#60-197B 10"up
5.	124.04'	Top nut of fire hydrant
6.	140.68'	Mag nail w/bw N PwP#8-197B 20"up
7.	115.81'	Cut 'x' SW bolt of aluminum pole base
8.	89.28'	PK nail SW PwP#4-197 A 8"up